Distortion Rate For Art - For .067 Plates Is 98.54%

DURO BAG
A NOVOLEX BRAND
1 Duro Way
Walton, KY 41094
Duro.ArtDepartment@novolex.com

CREATED BY: B. Wallrawe
TECHNICAL:
Finished Web 34 3/4"

DESIGN GROUP:
Jackson Series

D Bag
11 x 6 x 11 1/16
Left Over Right

DATE: 2/9/16
SCALE: FULL

This .020" Mircrodot Is For Flexographic Printing Only.
It Should Be Placed On Every Color At The
Center Of Largest Copy (Top To Bottom). The Left Microdot
Gets Placed 1/64" Inside The Paste Area.
The Right Microdot Gets Placed 1/64" Outside
The Right Side Back Fold Edge Line.

BORDER DESIGNS
Because Of Machine Movement In Bag
Conversion, Copy Should Be Placed At
Least 1¼" From Fold Lines Or Edges.
In The Top Area, Use 1½" Bleed.
Border Designs Should Be Kept 1/2" From
Fold Edges, Top Cutoff And Bottom Fold.

Vertical Center Lines Must Be Placed Here

PLEASE NOTE: All Screen, Half-Tones And Process Jobs Must Be Reviewed By Duro's Graphic Printing Division Before Preparing Art.

Fill All 5 Anti-Bounce Area With 40% Screen In All Colors Containing Screens

This Proof is For Copy, Elements And Position Only. NOT FOR COLOR APPROVAL.

Full Panel Print Must Bleed Into Top & Bottom Panel Of Bag, Which Is Indicated On Template

No Copy Areas
Fold And Paste Lines
No Art Or Copy Past These Lines
Live Copy Areas. Max Total 10% As Quoted
Bleed Lines
Center Lines
Distoration Rate 98.54%

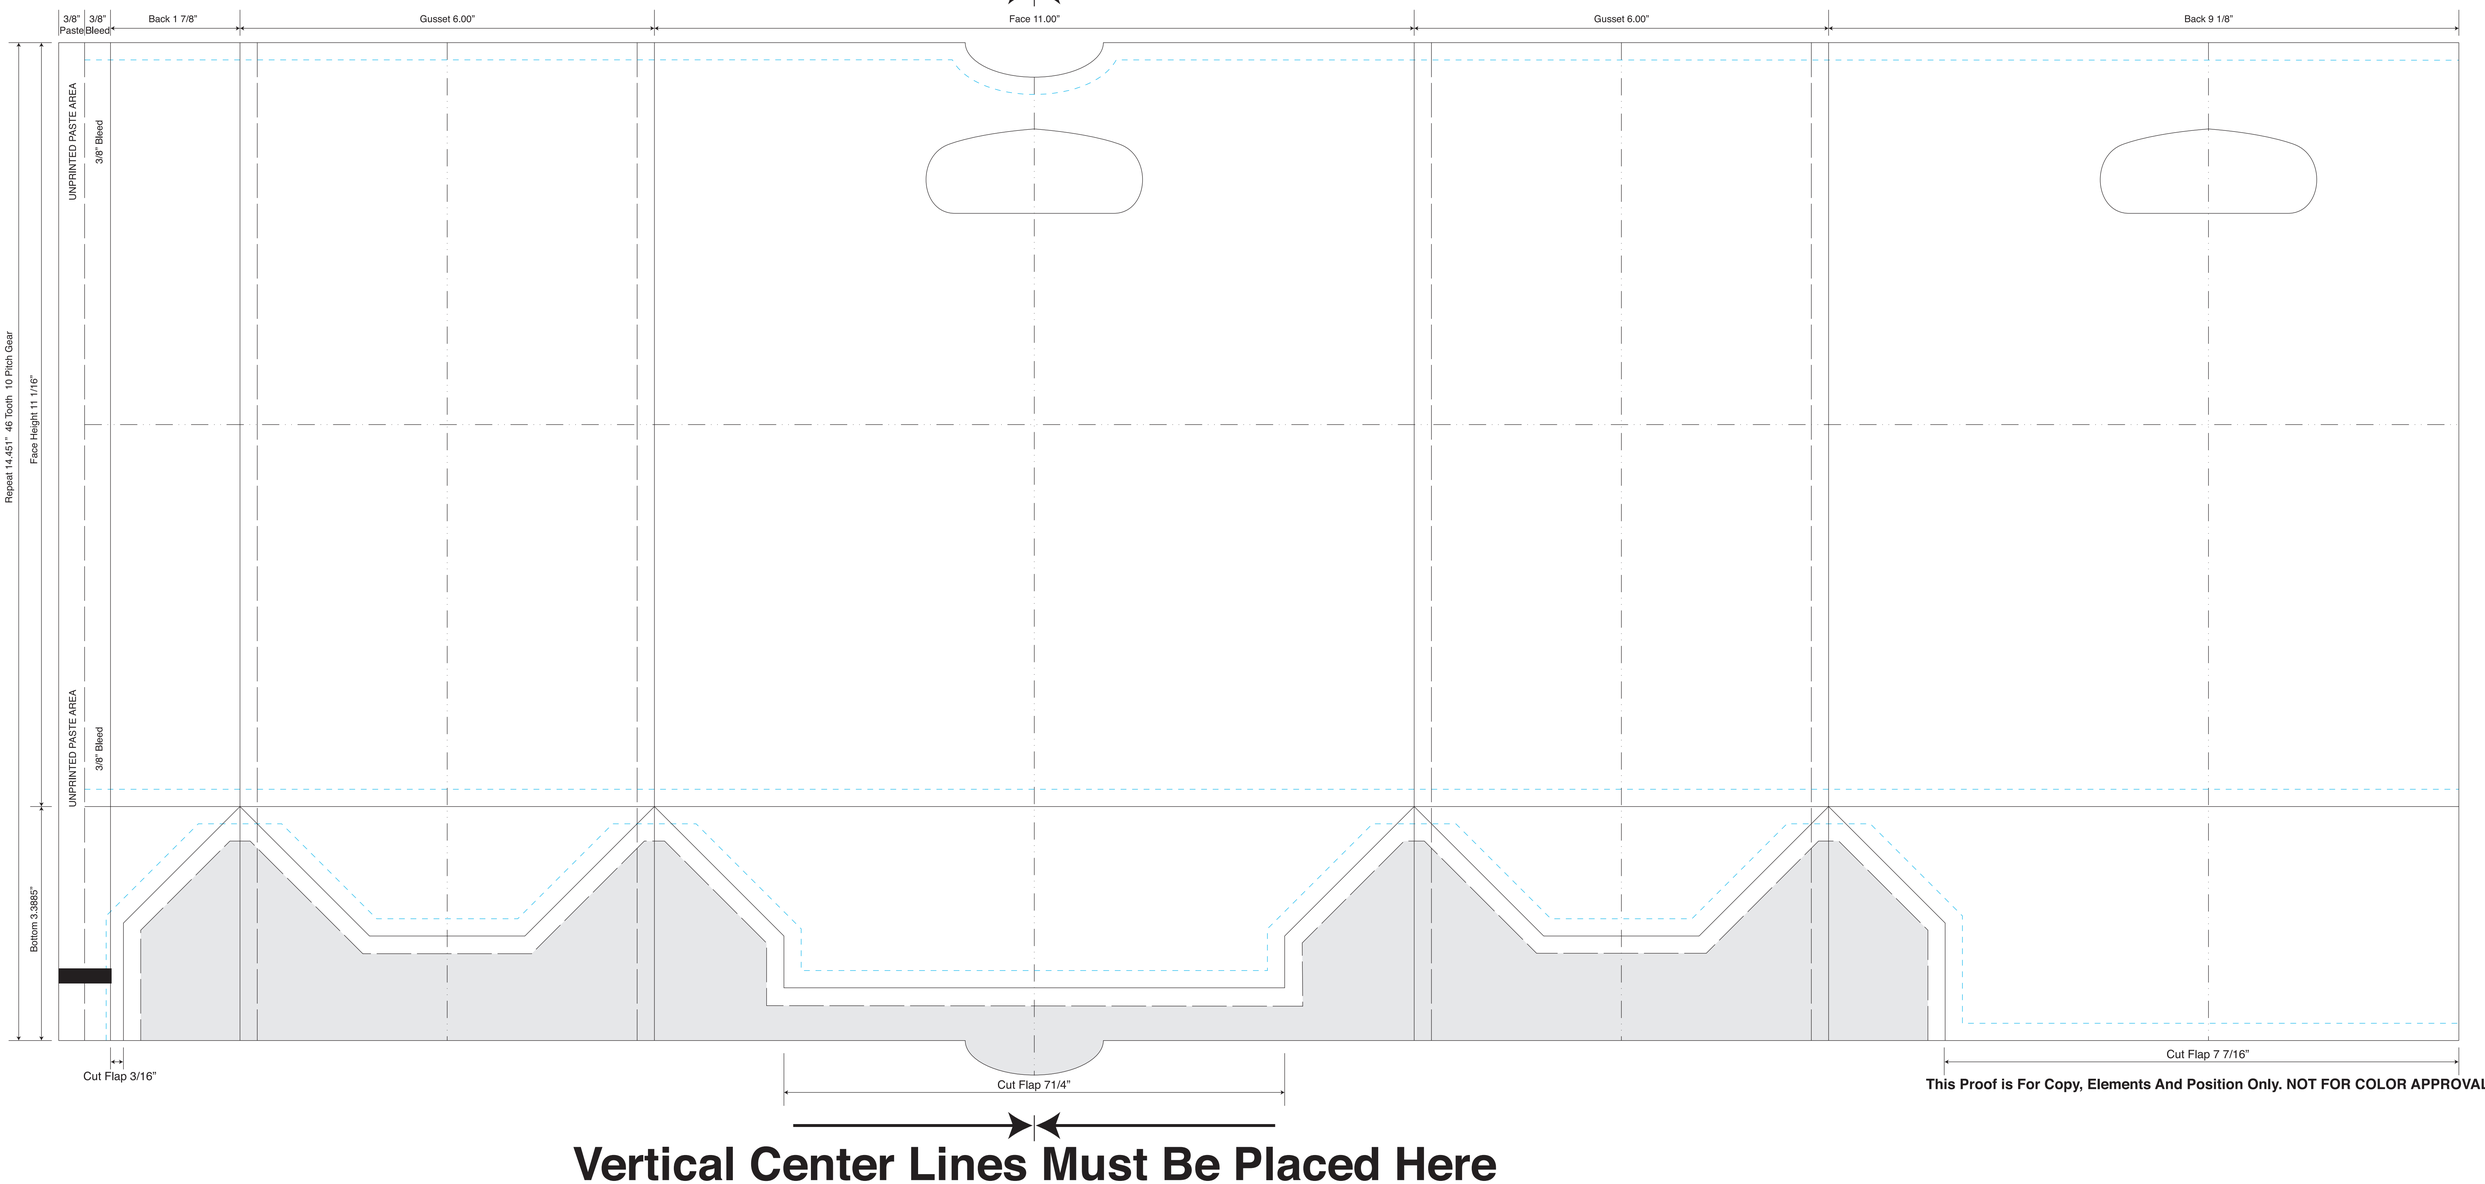

This Proof is For Copy, Elements And Position Only. NOT FOR COLOR APPROVAL.

Vertical Center Lines Must Be Placed Here